Model 6387
Banana Jack, Panel Mount, 4mm
For Sheathed Banana Plugs

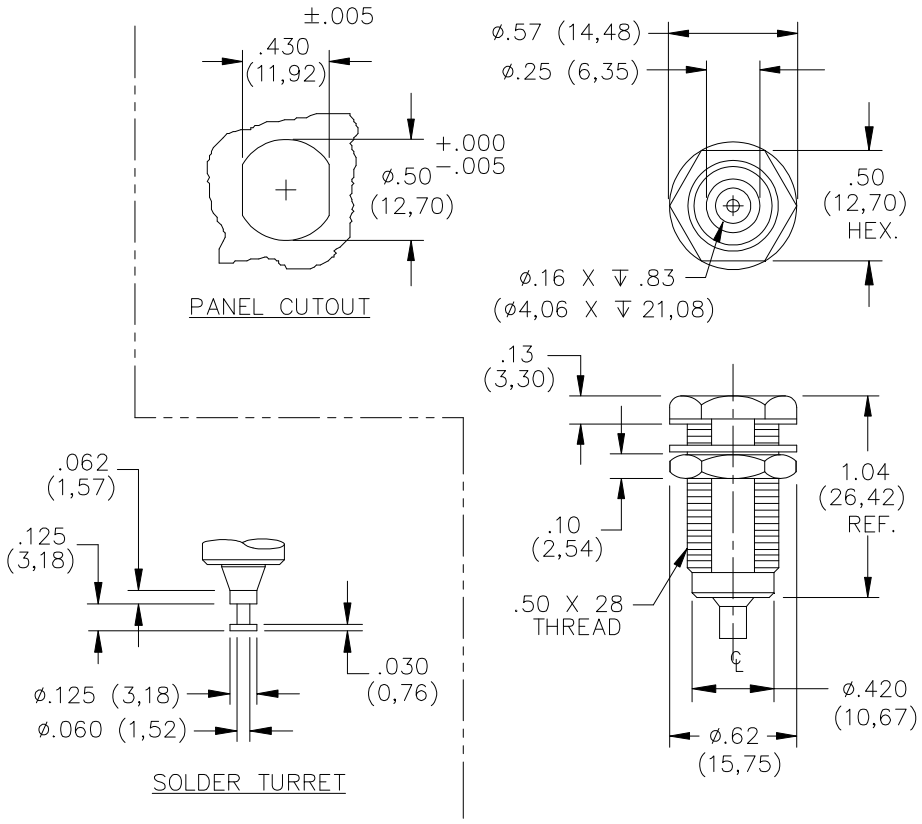

Recommended Maximum Panel Thickness: .57” (15mm)

FEATURES:

- Banana Jack mates to all popular shrouded and unshrouded DMM plugs
- Meets IEC 1010-2-031 CAT III 1000V

MATERIALS:
Banana Jack: Brass, Tin-plated
Terminal Type: Solder Turret
Insulation: Nylon, see ordering information for color
Nut: Brass, Nickel Plated

RATINGS:
Operating Voltage: 1000 VRMS Max.
Current: 15 Amperes Max.

ORDERING INFORMATION:
Model 6387-ST-T-*
* = Color, available in -0 Black, -2 Red

Sold in packs of 10.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (,51 mm), .xxx = ± .005” (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

USA: Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com
Europe: 31-(0) 40 2675 150 **International**: 425-446-5500 **Where to Buy:** www.pomonaelectronics.com

Rev: 101
D1094643

敏盛企業有限公司 http://www.mavin.com.tw
免責聲明 資料僅供參考，若有與原廠不合之處，請以原廠規格為準，且不供任何證明文件之用
TEL:03-5970828 FAX:03-5972622 新竹湖口工業區工業四路3號2F