


## Model 5054 Triaxial Cable Assembly Triaxial 2 Lug Male Each End, On Belden 9222 Triaxial Cable

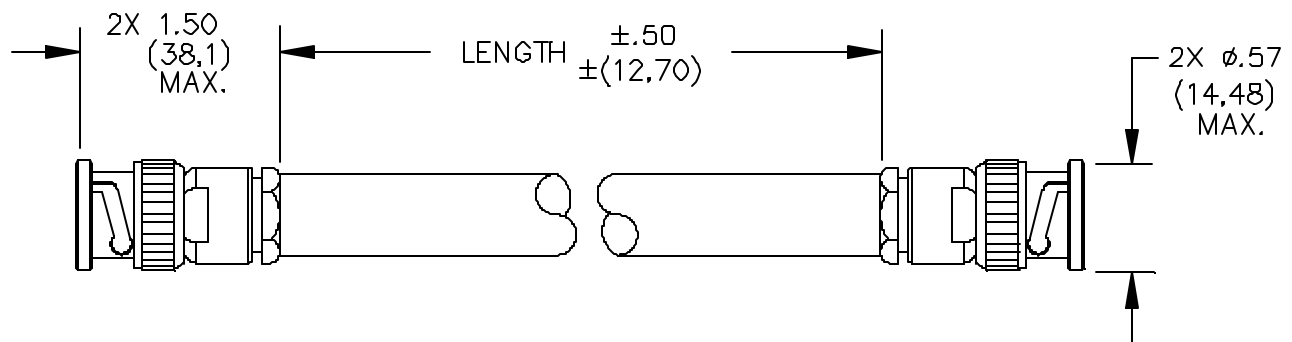

### MATERIALS:

Connector – 1<sup>st</sup> End: Triaxial Cable Male (BNC 2 Lug Bayonet Style)

Body and Fittings: Brass, Tarnish Resistant

Intermediate and Center contacts: Gold Plated Brass per MIL-C-39012

Cable: Belden 9222 Triaxial Cable

20 AWG stranding 7x28, T.C. Polyethylene Insulation, 6.15 (.242) O.D. Color: Yellow

Marking: “POMONA ELECTRONICS 5054-XX”

Connector – 2<sup>nd</sup> End: Same as first.

### RATINGS:

Operating Voltage: 500 VRMS

Nominal Impedance: 50 Ohms

### ORDERING INFORMATION: Model 5054-XX

XX = Length in inches. Std. Lengths: 36”, 60”

Additional lengths can be quoted upon request.

Ordering Example: 5054-36, Cable length will be 36” long

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

C:\Laura Goldberg\FlukeDataSheet\d5054\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360  
Technical Assistance: 800-241-2060

PomonaACCESS 90819 (800) 444-6785 or (425) 446-6010

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1